





D5A TA

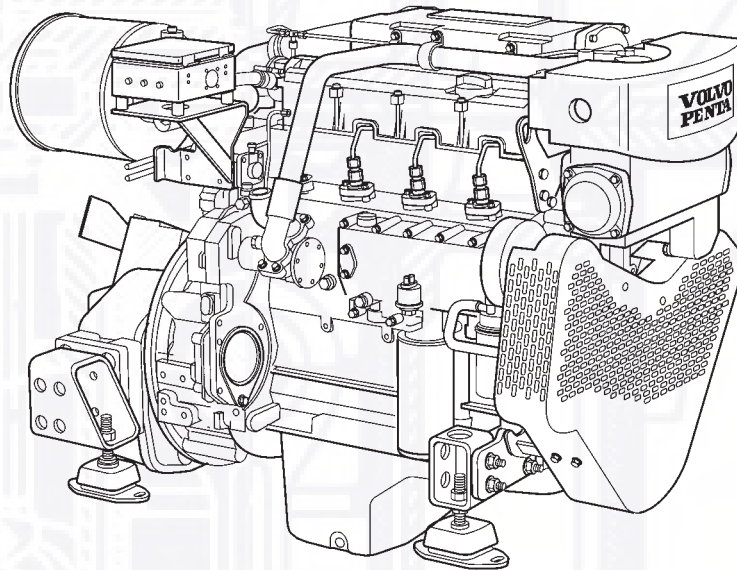

Technical Data

Engine designation	D5A TA		
No. of cylinders and configuration	in-line 4		
Method of operation	4-stroke, direct-injected, turbocharged diesel engine with aftercooler		
Bore/stroke, mm (in.)	108 (4.25)/130 (5.12)		
Displacement, l (in ³)	4.76 (290)		
Compression ratio	17.6:1		
Dry weight bobtail, kg (lb)	525 (1157)		
Dry weight with reverse gear ZF220, kg (lb)	570 (1257)		
	Rating 2	Rating 1	Rating 1
	2300 rpm	2300 rpm	1900 rpm
Crankshaft power, kW (hp)	118 (160)	102 (139)	89 (121)
Max. torque, Nm (lbf.ft) @ 1500 rpm	579 (427)	490 (362)	490 (362)
Specific fuel consumption, g/kWh (lb/hph) @ 2300 rpm	210 (0.340)	214 (0.347)	
g/kWh (lb/hph) @ 1900 rpm			203 (0.329)
Recommended fuel to conform to	ASTM-D975 1-D & 2-D, EN 590 or JIS KK 2204		
Emission compliance	EU IWW, CCNR2		
Flywheel housing/SAE size	10"/11,5"/SAE2, 14"/SAE1		

Technical data according to ISO 3046 Fuel Stop Power and ISO 8665. Fuel with a lower calorific value of 42700 kJ/kg and density of 840 g/liter at 15 °C (60 °F). Merchant fuel may differ from this specification which will influence engine power output and fuel consumption. Ratings R1 & R2, see explanation in Volvo Penta's Product Guide.

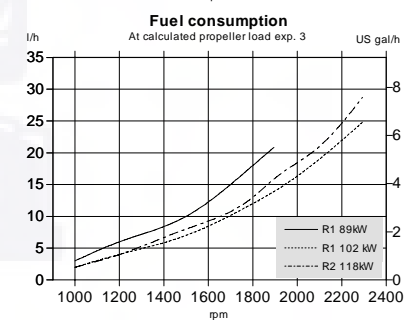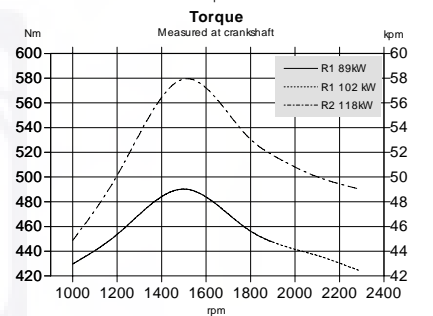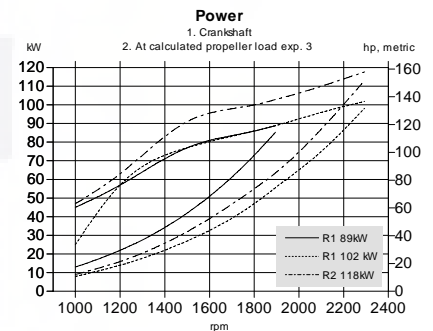

D5A TA

Technical description:

Engine and block

- Cylinder block, head and flywheel housing made of cast iron
- Belt guard
- Combined 10" and 11.5" flywheel with SAE 3 housing
- Nitrocarburized transmission gears
- Press-hardened crankshaft
- Forged aluminum pistons
- Cylinder liners of wet type

Lubrication system

- Oil filler in valve cover
- Oil sump made of cast iron
- Manual oil drain pump
- Rotary lubrication oil pump
- Freshwater-cooled oil cooler
- Full flow oil filters of spin-on type
- Closed crankcase ventilation system
- Fuel system
 - Fuel feed pump
 - Fine fuel filter of spin-on type
 - Unit pumps
 - Six-hole injectors
 - Mechanical governor with smoke limiter
 - Fuel stopping solenoid 24V

Cooling system

- 2-circuit keel cooling system with expansion tank
- Gear-driven seawater pump
- Belt-driven freshwater pump
- Freshwater-cooled turbocharger and exhaust manifold

Electrical system

- 2-pole 24V electrical system, 24V/55A alternator, 24V 4kW starter
- Senders and switches:
 - ❖ Tachometer
 - ❖ Lubrication oil pressure
 - ❖ Cooling-water temperature
 - ❖ Cooling-water level
- Rubber-suspended electrical terminal box with semi-automatic fuses and plug-in connection

Optional equipment

Engine

- Flexible suspension for engine and reverse gear
- Combined 10"/11.5" flywheel with SAE 2 housing

Lubrication system

- Shallow oil sump
- Twin oil filters, for remote mounting

Fuel system

- Hand pump
- Jacketed fuel pipes
- Single or twin fuel/water separating pre filter
- Twin fuel filters, for remote mounting

Exhaust system

- Exhaust elbow, wet
- Exhaust elbow, dry, with integrated flexible compensator
- Silencer, dry

Cooling system

- Engine-mounted tubular heat exchanger with integrated expansion tank
- Seawater filter

Electrical system

- 1-pole 12V electrical system, 12V/95A alternator, 12V/3.1kW starter
- 24V/140A alternator
- Engine heater 230V/820W
- Senders:
 - Charge air pressure
 - Gearbox oil pressure
- Cable harness in different lengths
- Various instrument panels

Power transmission

- PTO crankshaft front end, type stub shaft
- Hydraulic pump for steering and other duties

Reverse gear

- ZF45

Dimensions D5A TA/ZF45

Not for installation

